

# ÖVSV

ÖSTERREICHISCHER VERSUCHSENDEVERBAND  
WWW.OEVSV.AT

# UHF-VHF ANTENNA

## Duoband J-Pole

### 240 Ohm Twin lead



## Youngsters On The Air





ÖVSV

ÖSTERREICHISCHER VERSUCHSSENDEVERBAND  
WWW.OEVSV.AT

# Halfwave Duoband antenna

## PRINCIPLE





Youngsters On The Air

© övsv 2




# Features of 1/2 wave

- Building a duoband halfwave antenna for portable use
- Significant gain on both bands (144Mhz, 433Mhz)
- Easy to transport (roll-up)
- Perfect SWR
- Good radiation pattern

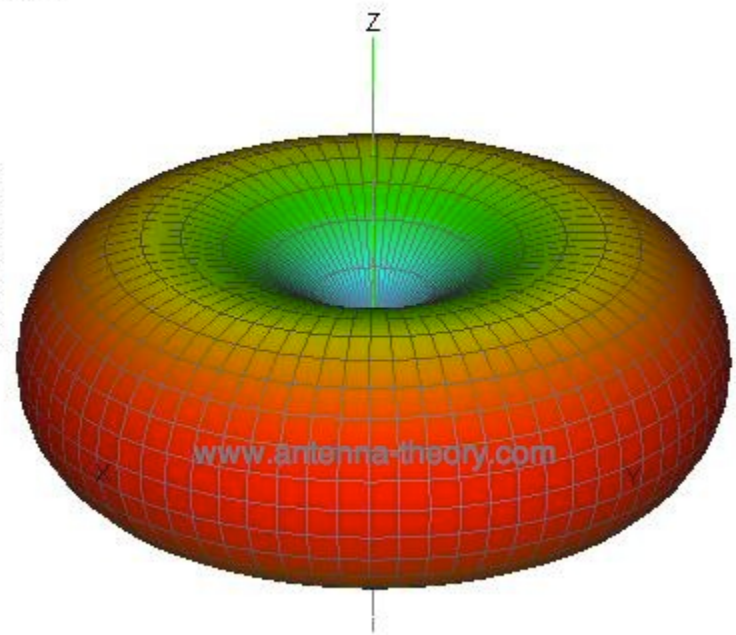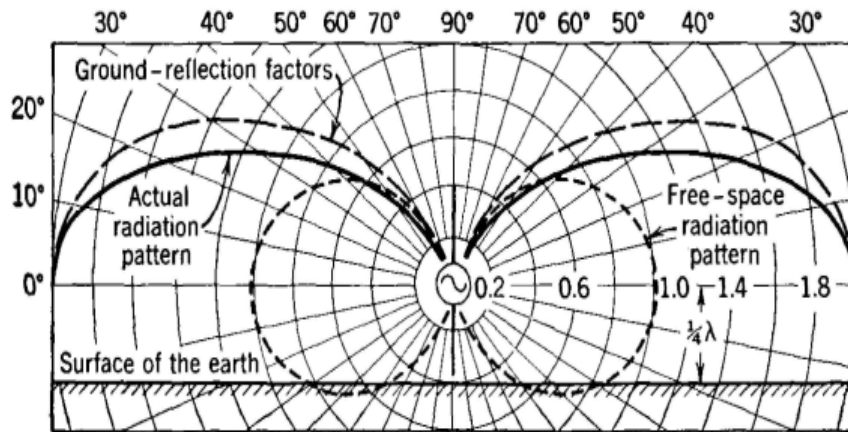


## 144Mhz

- Half Wave radiator
- Quarter wave transforming line

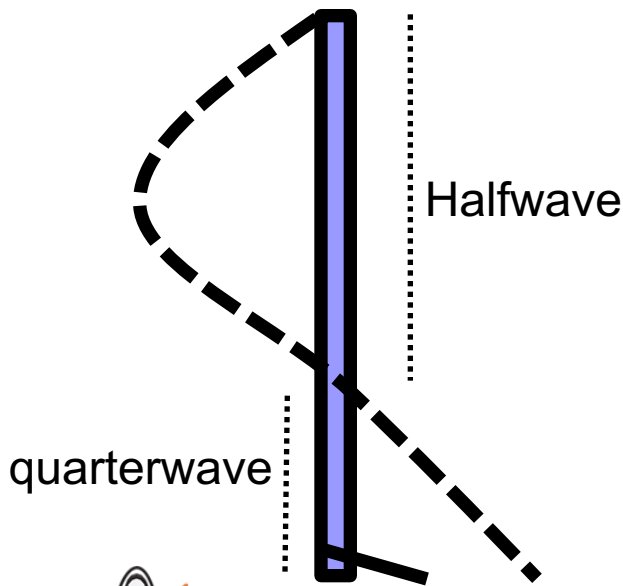


## 433Mhz

- Half wave radiator
- Quarter wave stub (trap)
- $\frac{3}{4}$  wave transforming line

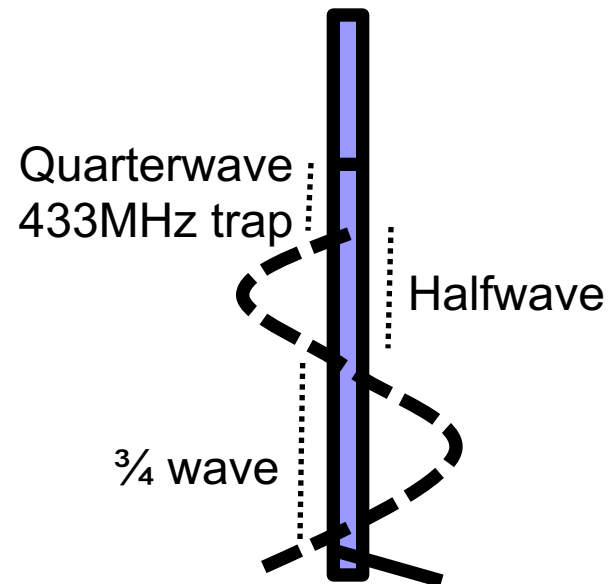


## A quarter wave is blocking 70cm

- Paralell cable is  $1/4w * Vf$
- $70/4=17,5*0,83=14,7\text{cm}$
- Like parallel resonator
- High impedance
- Cut-off upper section
- Principle also works on HF
- Called „trap“ or „stub“

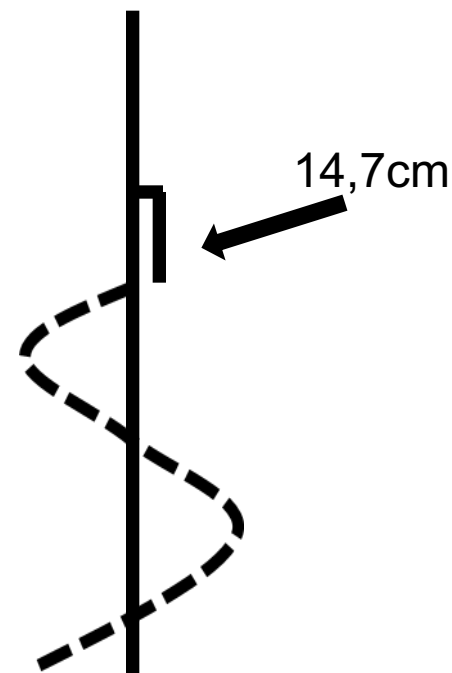


# Construction plan

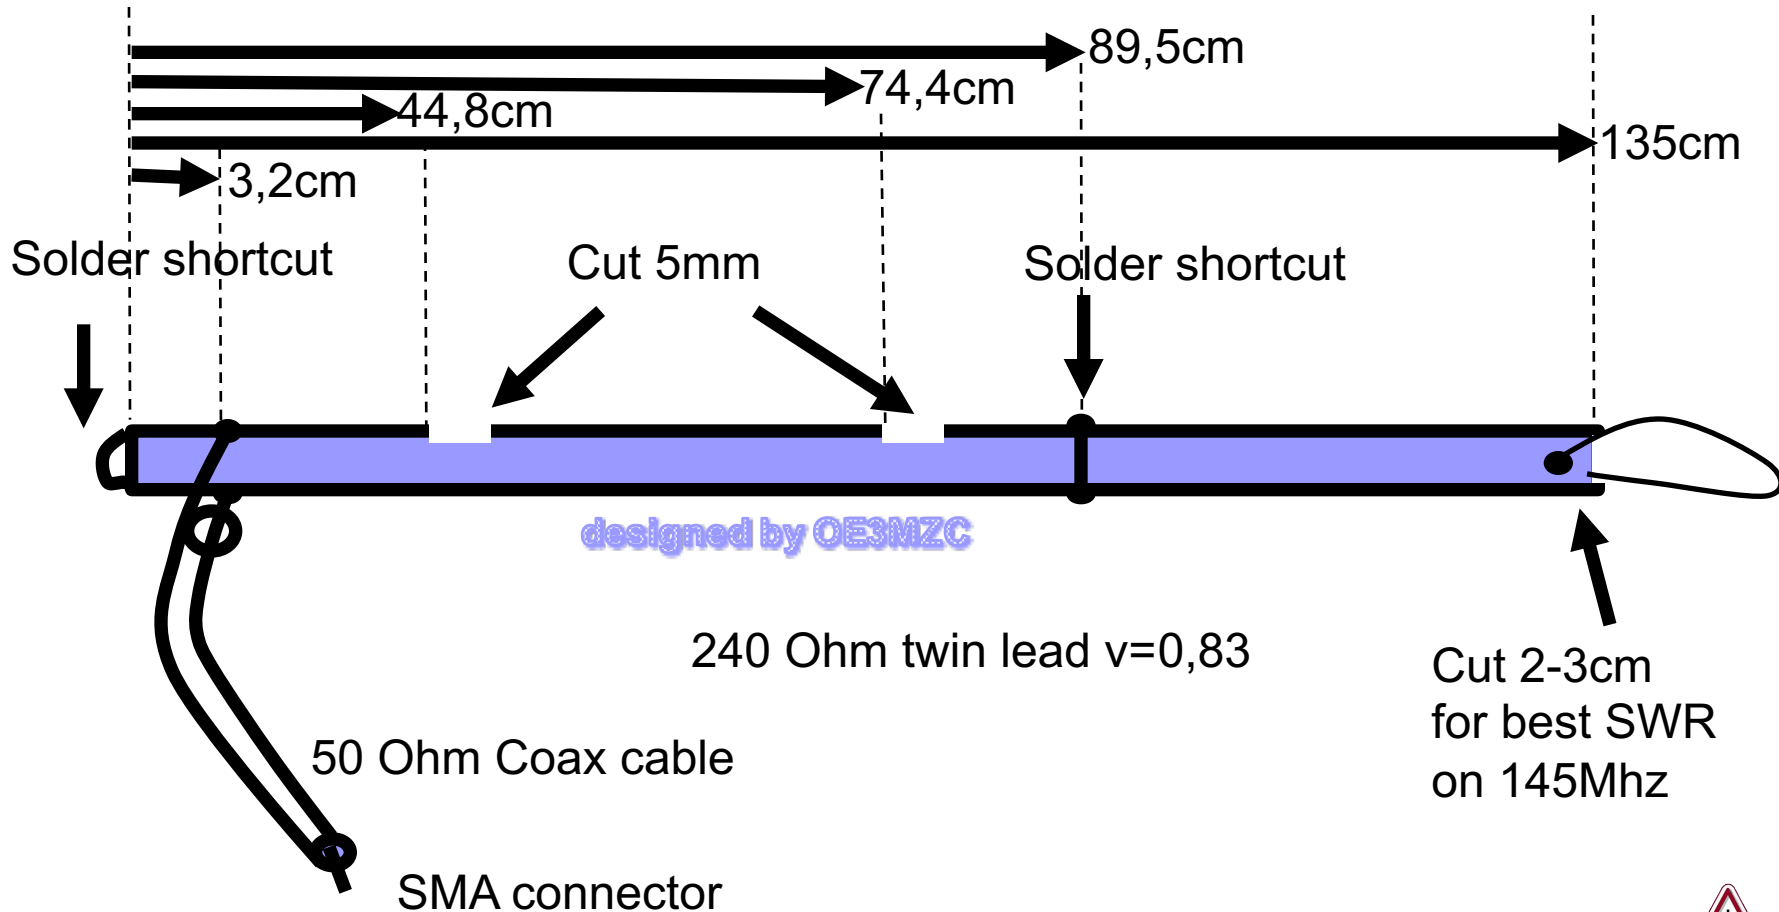

- Cut 140cm of twin lead
- solder short-cut at bottom end
- Measure from bottom end 44,8 cm and cut-out 5mm on one side only!
- Measure from bottom end 74,4 cm and cut-out 5mm on same side only!
- Measure from bottom end 89,5 cm and solder short cut
- Measure from bottom end 3,2 cm and solder coax cable (inner lead on long part of antenna)
- Cut overall length to 135cm and check SWR for 1:1,5 on both bands (145MHz/433MHz)





# ÖVSV

ÖSTERREICHISCHER VERSUCHSENDEVERBAND  
WWW.OEVSV.AT

# READY!

Please use it  
at SOTA excursion!



Youngsters On The Air

